

Wisteria


Installationsanleitung



Sicherheitsanweisungen:

Die Installation sollte ausschließlich von qualifizierten Elektrikern durchgeführt werden

- Stellen Sie sicher, dass während der Installation der Strom abgestellt ist
- Verbinden Sie die Kabel, sowie sie beschriftet sind
- Der maximale Strom sollte 16A in einer Einspeiseschaltung nicht überschreiten

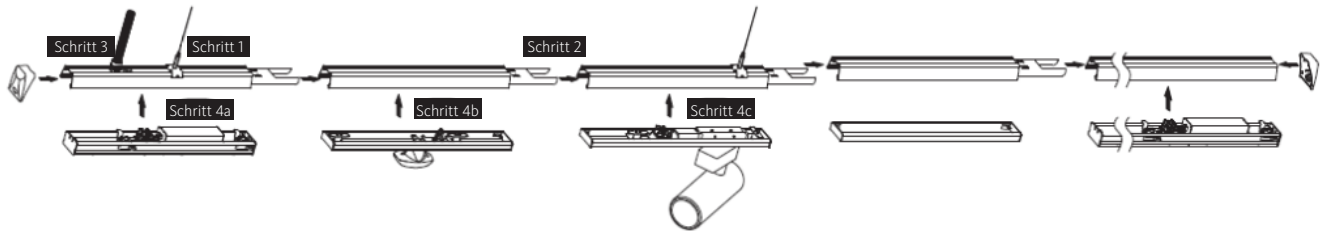


Schritt 1

Schritt 2



Schritt 3

Mounting Suspension


Drill a hole on ceiling



Fix mounting hook into ceiling



Adjust length of suspension cord:
a. press down Hexagon bolt;
b. Pull in/out cord to adjust length




Click in mounting clip into trunking rail

Connecting Trunking Rail

Both trunking rails should keep in perfect position then push to click



How to dispatch the connected trunking rails in case of misoperation



To separate both trunking rails screw off the rail connecting screws then pull apart



Connecting Power Supply



Cut the Rubber cap to pass the power cable



Screw in the conduit gland




Put in conduit with cable inside and pull up conduit gland to lock




Connect wires according labeling on wires to feed in connector then connect to connector in trunking rail

Schritt 4a

Mounting Luminaire



Slide knob to select phase L1/L2/L3



Make sure male & female connectors in right position then fix the luminaire to trunking rail



Push the sliding lock to lock the luminaire to trunking rail



Cover with protection cap

Schritt 4b

Mounting Sensor Module

2 options: Motion Sensor
Daylight Sensor




Dial switch to set sensor index
For details, please refer to sensor setting data sheet



Click in and connect cable to corresponding cable connector



Select phase to control corresponding dimming lights L1/L2/L3




Rotate the knob to horizontal direction and press down to lock



Twist sensor head to adjust angle

Remarks:

First trunking rail should have one side connecting plate&last trunking rail with no connecting plate on both sides, then fix the Luminaire to trunking rail then slide the locks, cover with protection caps, then keep end caps at both sides.

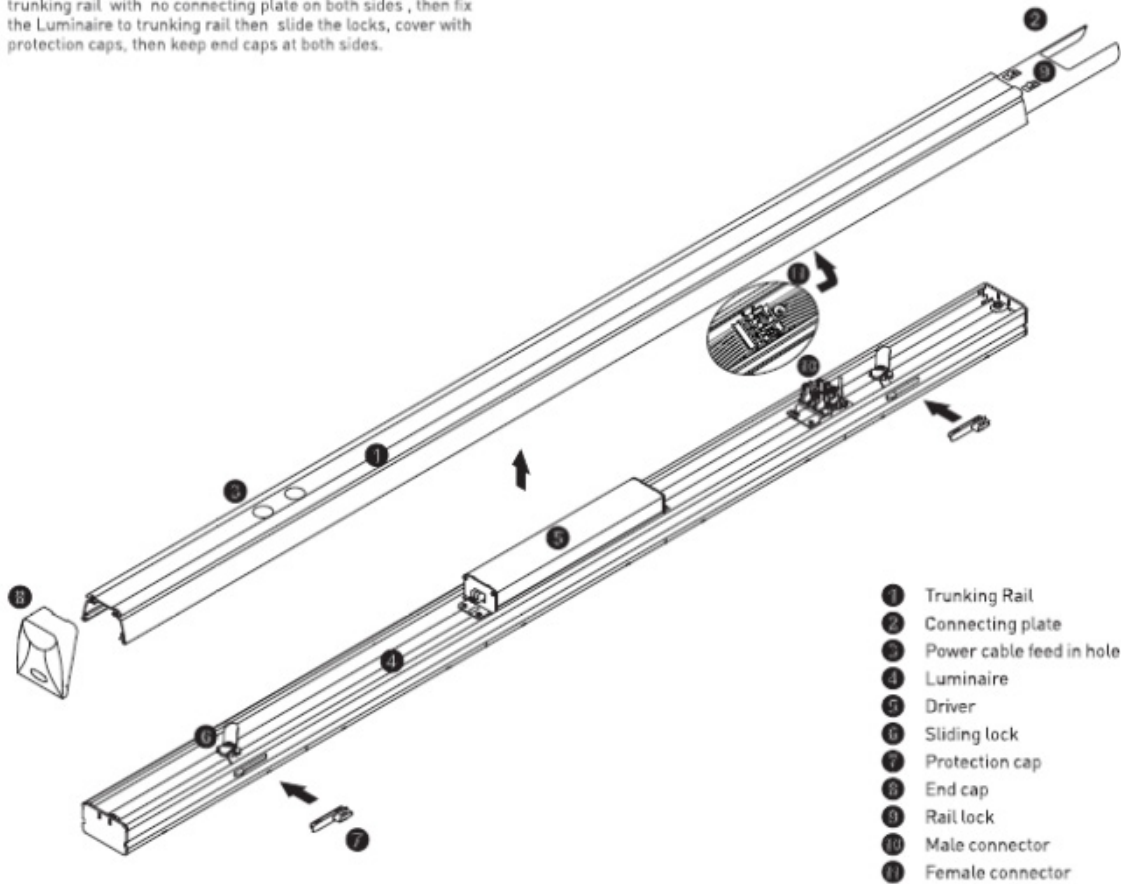
Five options for power feed in
