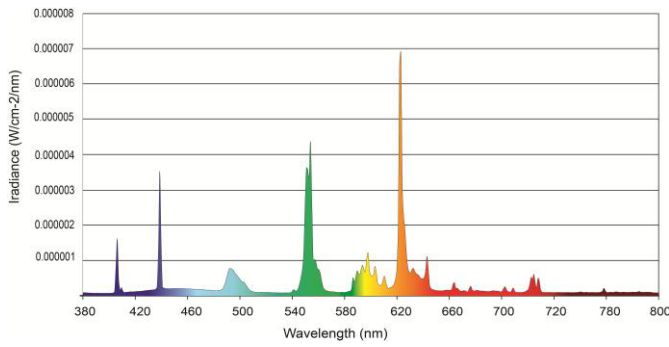
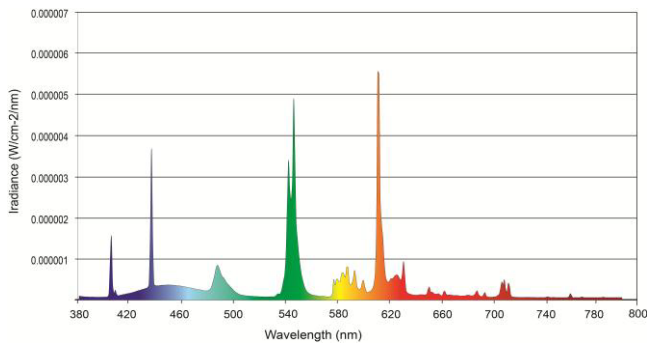


**UNIQUE-L 18 W - 36 W - elect.**

		18	24	36	
Nominal wattage (W)		18	24	36	
Nominal length (mm)		220	315	410	
Width (mm)		37,3	37,3	37,3	
Tube diameter (mm)		17,3	17,3	17,3	
Weight (g)		75	100	125	
Colour Rendering Index CRI		≥ 80	≥ 80	≥ 80	
Temp. for max. luminous flux (°C)		25	25	25	
Light Colour		830	840	830 840	
Correlated Colour Temp. CCT (K)		3000	4000	3000 4000	
Nominal Luminous flux <sup>1)</sup> @ 25 °C (lm)		1200	1800	2900	
Lamp efficacy <sup>1)</sup> @ 25 °C (lm/W)		67	75	81	
Energy Class		A	A	A	
kW/1000 hrs		19,8	26,4	39,6	
Electrical Data	Elect. <sup>2)</sup>	Rated Wattage (W)	18	24	36
		Lamp voltage (V)	50	75	90
		Lamp current (A)	0.320	0.300	0.360
LLMF - Lamp Lumen Mainte. Factor - Elect.	2,000 h	0,98			
	4,000 h	0,97			
	6,000 h	0,96			
	8,000 h	0,94			
	12,000 h	0,92			
	16,000 h	0,9			
	20,000 h	0,9			
	24,000 h	0,9			
	32,000 h	0,9			
	40,000 h	0,9			
LSF - Lamp Survival Factor - Elect.	2,000 h	1			
	4,000 h	1			
	6,000 h	1			
	8,000 h	1			
	12,000 h	1			
	16,000 h	1			
	20,000 h	1			
	24,000 h	0,99			
	32,000 h	0,99			
	40,000 h	0,97			
48,000 h	0,9				
Dimmable		Yes			
Cap		2G11			
Mercury content (mg)		3,0 ± 0,5			
IEC		60901			

1) after 100 h  
2) Electronic Ballast

**Spectral distribution 830**

**Spectral distribution 840**


Packing data	18 W	24 W	36 W
Box size (mm)	255 x 95 x 145	355 x 95 x 145	445 x 95 x 145
Lamps per box (pcs)	10	10	10
Weight per box (kg)	0,85	1,2	1,5