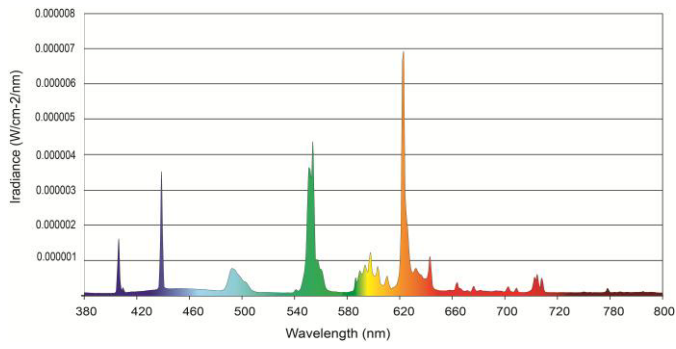
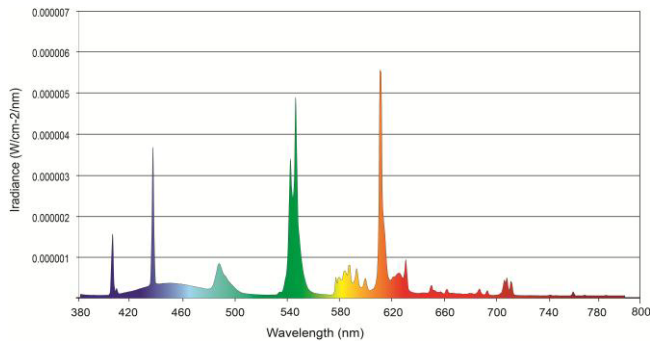


**UNIQUE-L 40 W - 80 W - elect.**

		40	55	80			
Nominal wattage (W)		40	55	80			
Nominal length (mm)		533	533	565			
Width (mm)		37,3	37,3	37,3			
Tube diameter (mm)		17,3	17,3	17,3			
Weight (g)		155	155	165			
Colour Rendering Index CRI		≥ 80	≥ 80	≥ 80			
Temp. for max. luminous flux (°C)		25	25	25			
Light Colour		830	840	830	840		
Correlated Colour Temp. CCT (K)		3000	4000	3000	4000		
Nominal Luminous flux <sup>1)</sup> @ 25 °C (lm)		3500	3500	4800	4800	6000	6000
Lamp efficacy <sup>1)</sup> @ 25 °C (lm/W)		88	88	87	87	75	75
Energy Class		A	A	A	A	A	A
kW/1000 hrs		44	44	60,5	60,5	88	88
Electrical Data Elect.2)	Rated Wattage (W)	40	55	80			
	Lamp voltage (V)	126	101	145			
	Lamp current (A)	0.320	0.550	0.555			
LLMF - Lamp Lumen Mainte. Factor - Elect.	2,000 h		0,98				
	4,000 h		0,97				
	6,000 h		0,96				
	8,000 h		0,94				
	12,000 h		0,92				
	16,000 h		0,9				
	20,000 h		0,9				
	24,000 h		0,9				
	32,000 h		0,9				
	40,000 h		0,9				
LSF - Lamp Survival Factor - Elect.	2,000 h		1				
	4,000 h		1				
	6,000 h		1				
	8,000 h		1				
	12,000 h		1				
	16,000 h		1				
	20,000 h		1				
	24,000 h		0,99				
	32,000 h		0,99				
	40,000 h		0,97				
48,000 h		0,9					
Dimmable		Yes					
Cap		2G11					
Mercury content (mg)		3,0 ± 0,5					
IEC		60901					

1) after 100 h

2) Electronic Ballast

**Spectral distribution 830**

**Spectral distribution 840**


Packing data	40 W	55 W	80 W
Box size (mm)	565 x 95 x 145		605 x 95 x 145
Lamps per box (pcs)	10	10	10
Weight per box (kg)	2,25		2,35