

Aura Corridor HF sensor, Dim (Europe)

MWS3A-DD-R2


Art nr. 760142

MWS3A-AD-R2

Art nr. 760124



CORRIDOR FUNCTION

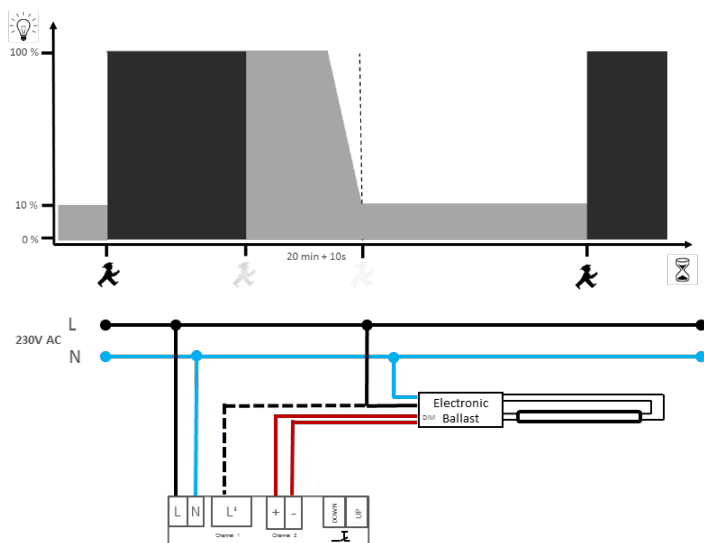


Remote Control : UNHSLCD:


Sensor in default mode

Options:

Orientation light 10 - 99 %

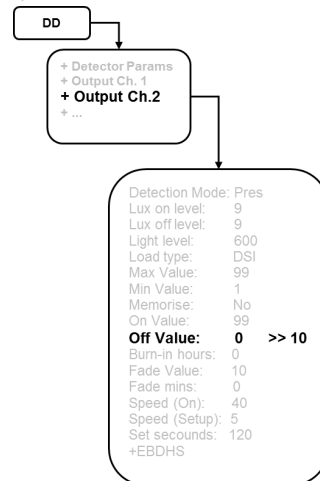

2-STEP CORRIDOR FUNCTION

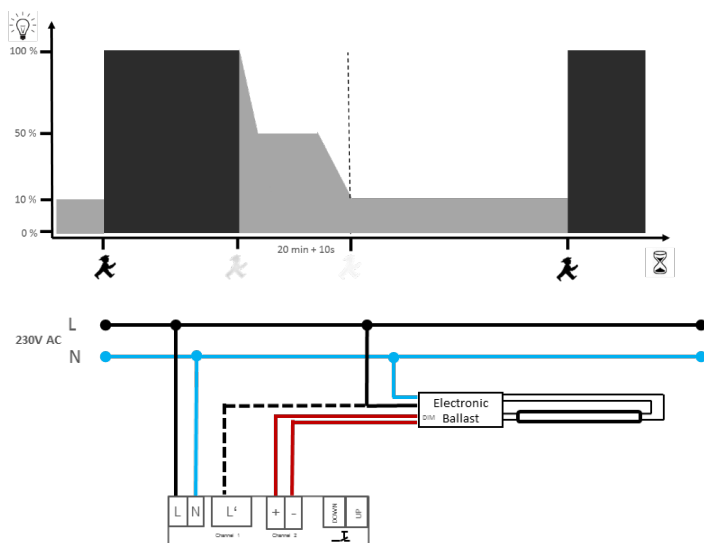

Remote Control : UNHSLCD:


Sensor in default mode

Options:



Orientation light: 10 - 99 %

Fade light: > 10 - 99 %

Fade time : 1-99 mins

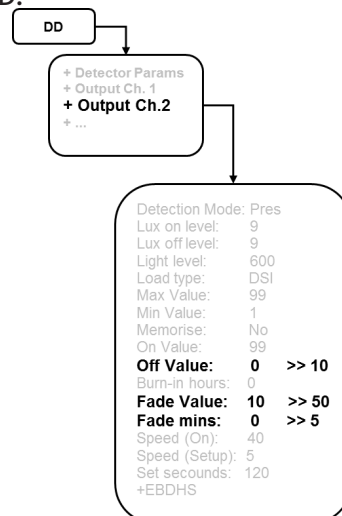


DIM FUNCTION WITH JALOUSIE SWITCH

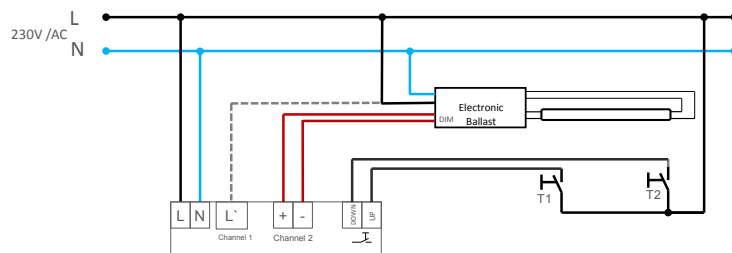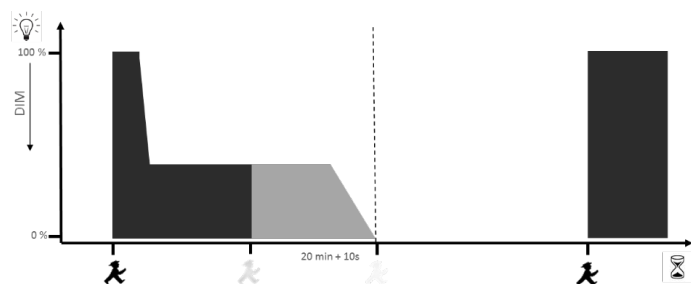


Remote Control : UNHSLCD:

Sensor in default mode


DIM FUNCTION ONE MOMENTARY SWITCH

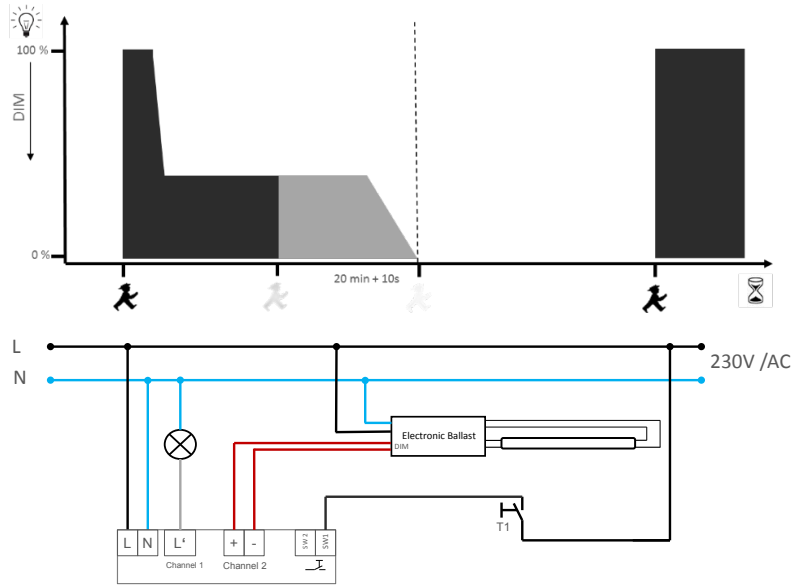

Remote Control : UNHSLCD:
Sensor in default mode

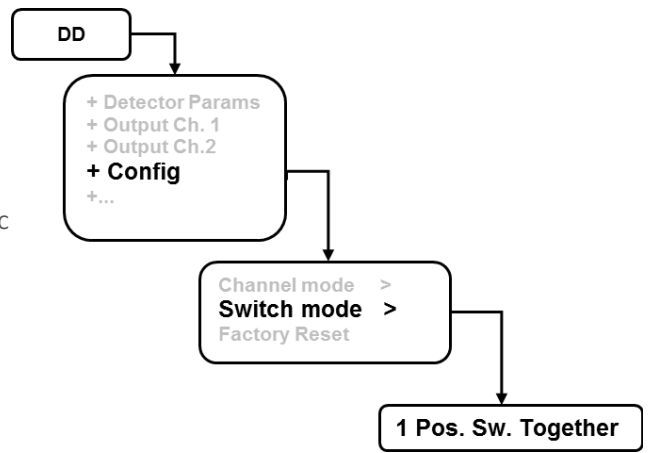

DAYLIGHT LINKING

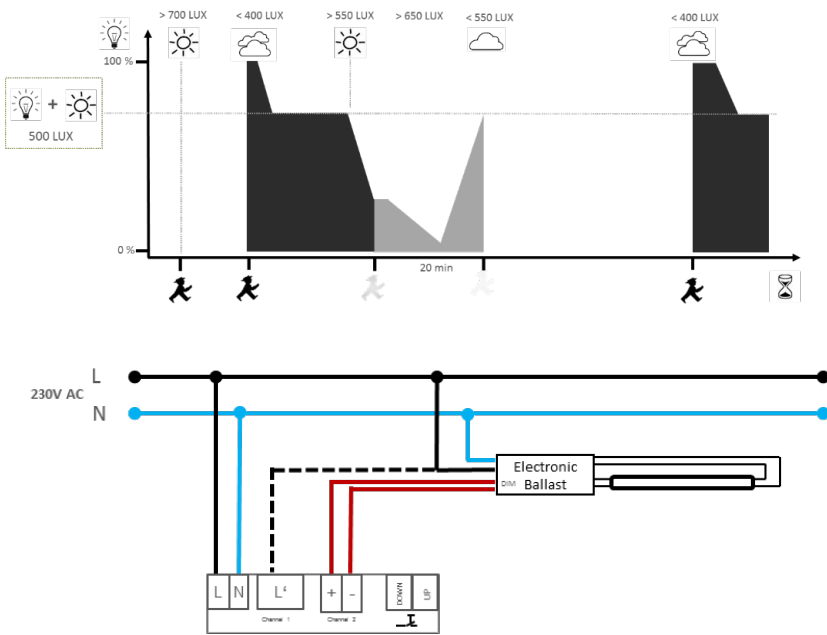

Remote Control : UNHSLCD:
Sensor in default mode

Comment:
Setting depends on local light
Situation and need of light

