

Corridor Function Profile 2 (P2)

Profile 2 - 100% at presence/10% absence, OFF after 30min.

Luminaire with integrated sensor (Master):

Installation: L, N, PE

The terminal block also have "Lout". This makes it possible to connect slave luminaires with Corridor Function..

Luminaire with integrated sensor and through-wiring:


Installation: L, N, PE

The version can NOT be connected to slave luminaires.


Luminaire for external sensor (Slave):

Controlled by a Master luminaire or an external 230V sensor.

Installation: L, N PE, DA and DA.

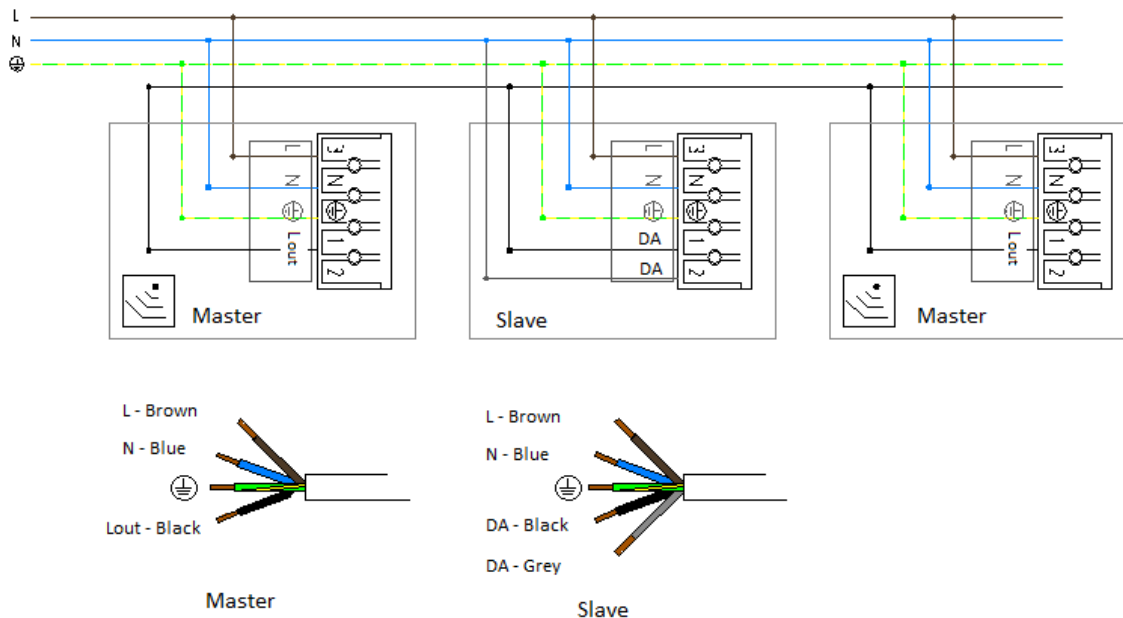

Light levels P2

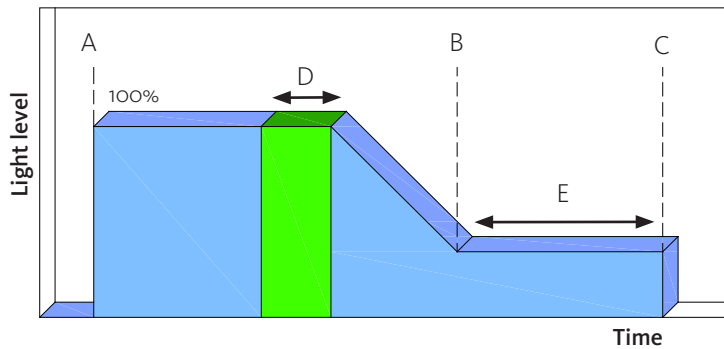

A: 100% light level (presence)

B: 10% light level (absence)

C: OFF

D: Hold time on sensor

E: Hold time 10% light level, 30 minutes